optris CTi LThot
TECHNICAL DATA

optris infrared measurements

Precise non-contact temperature measurement from –50 °C to 1050 °C in rough environmental conditions



Features:

- The new infrared thermometer for hot environmental temperatures up to 250 °C without any need of cooling
- A varity of applications in dryers, ovens, heat treatment lines in the metal and glass industry, paper, plastic and textile manufacturing and semiconductor processing in the temperature range of –50 °C to 1050 °C and a response time up from 40 ms
- Selectable analog outputs:
  0/4 – 20 mA, 0 – 5 V, 0 – 10 V, thermocouple type K
- Optional EtherNet/IP, Profinet, Ethernet TCP/IP / Modbus TCP, Modbus RTU, RS485, RS232 interface or relay outputs (2 x optically isolated)
- Easy and flexible exchange of sensing heads

General specifications	
Environmental rating	IP 67 (NEMA-4)
Operating temperature range[1)]	–20 °C ... 250 °C (sensing head) –20 °C ... 85 °C (electronics)
Storage temperature	–40 °C ... 250 °C (sensing head) –40 °C ... 85 °C (electronics)
Operating air humidity range	10 – 95 %, non condensing
Vibration (sensor)	IEC 60068-2-6 (sinus shaped) IEC 60068-2-64 (broadband noise)
Shock (sensor)	IEC 60068-2-27 (25G and 50G)
Weight	200 g (sensing head incl. massive housing) / 420 g (electronics)
Electrical Specifications	
Output / analog (2x)	0 / 4 – 20 mA, 0 – 5 / 10 V, thermocouple K, alarm
Output / alarm	24 V / 50 mA (open collector)
Relay outputs (optional)	2 x 60 V DC/ 42 V AC_{RMS}; 0.4 A; optically isolated
Digital Interfaces	built-in USB-interface, Optional: EtherNet/IP, Profinet, EtherCAT, Ethernet TCP/IP / Modbus TCP, Modbus RTU, RS485, RS232 or relay outputs (2 x optically isolated)
Output impedances	mA max. 500 Ω (with 8 – 36 V DC) mV min. 100 kΩ load impedance thermocouple 20 Ω
I/O Pins (3x)	flexible programming as in- or output: external emissivity adjustment, ambient temperature compensation, uncommitted value, trigger (reset of holdfunctions), alarm output (open collector 24 V/ 50 mA)
Cable length	3 m (standard), 8 m, 15 m
Power supply	8 - 30 V DC / 1.2W

Measurement specifications	
Measuring Temperature range (scalable via programming keys or software / App)	-50 °C … 1050 °C
Spectral range	8 – 14 µm
Optical resolution (90% energy)	2:1 10:1
Smallest spot size	3.0 mm @30 mm (LThot 10:1 CF1 lens)
Measurement uncertainty [2), 3), 4), 5), 7)]	±1.5 °C or ±1 %
Repeatability [2), 3), 4), 5), 7)]	±0.13 °C or ±0.1 % (LThot 2:1) ±0.16 °C or ±0.1 % (LThot 10:1)
Temperature resolution (display)	0.1 K
NETD (typically) [4), 5), 6), 7)]	37 mK (LThot 2:1) 45 mK (LThot 10:1)
Response time (90% energy)	45 ms (LThot 2:1) 40 ms (LThot 10:1)
Emissivity / Gain (adjustable via programming keys or software / App)	0.05 – 1.100
Transmissivity / Gain (adjustable via programming keys or software / App)	0.05 – 1.100
Signal processing (parameter adjustable via programming keys or software/ App)	Peak hold, valley hold, average; extended hold functions with threshold and hysteresis
Software / App	Optris CompactPlus Connect / IRmobile App


1) The LCD displays capacity may be limited at ambient temperatures below 0 °C
2) Whichever is greater
3) T_{obj} >0 °C
4) ε = 1
5) Response time = 200ms
6) T_{obj} = 25 °C
7) at ambient temperature 23 ± 5 °C

Optris GmbH & Co. KG · Ferdinand-Buisson-Str. 14 · 13127 Berlin · Germany
Phone: +49 30 500 197-0 · Fax: +49 30 500 197-10 · E-mail: info@optris.de · www.optris.com


optris CTi LThot

Optical specifications


Optics: SF D:S: 10:1

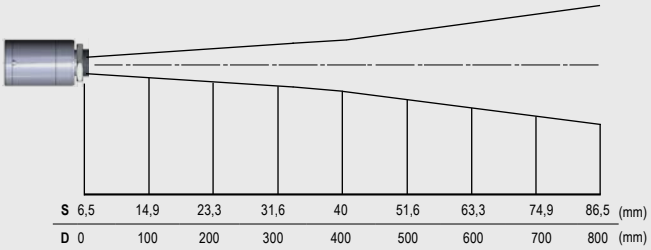

Optics: SF D:S: 2:1

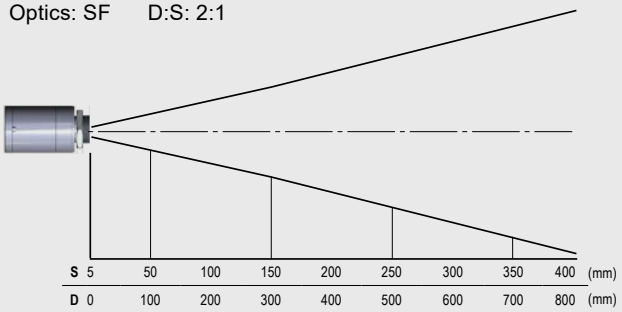

Optics: CF1 | D:S: 10:1
3,0mm@ 30mm | D:S (far field) = 3:1

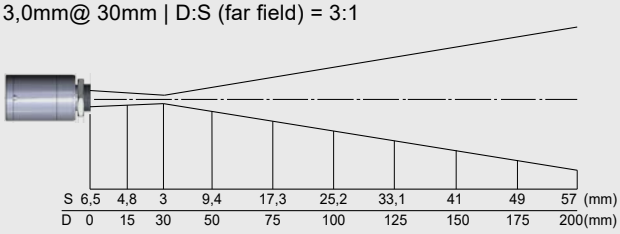




More optical data: https://optris.com/optris-calculator/






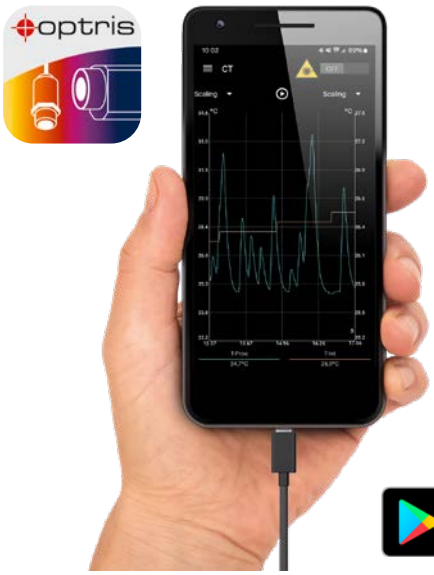

GET IT ON Google Play

Dimensions (in mm)

Electronics

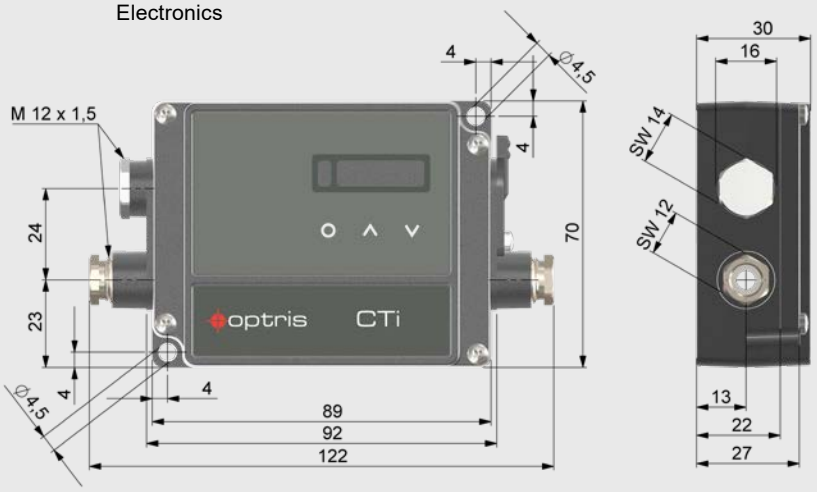

Sensing head
with Massive housing

